




# 15

## Conveyor / Skate Wheel



### Specifications

- Wheel Type:** Steel, Non-Precision, Low Profile
- Load Capacity:** 100 lbs.
- Body Diameter:** 1-17/32"
- Bore Size & Type:** 1/4" – Round; Length 13/16"
- Lubrication:** Oil or Grease
- Ball Complement:** (7) - 1/4" Diameter
- Material:** Zinc Plated Steel Shell, Washer, and Inner Race, Hardened Raceways and Sterling® Steel Balls. *Also available in Stainless Steel*
- Temperature Range:** Oil, -10 to 400 F°  
Grease, -40 to 300 F°
- Regreasable:** No – Maintenance Free
- Protection:** Labyrinth Shield, Front & Back
- Other:** Polyurethane tires, no lube & extreme cold oil available; contact Customer Service

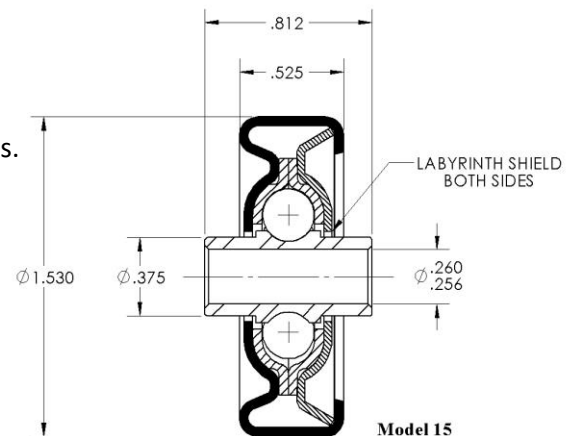

**Part Number for Ordering:**  
Oil - 0015216023  
Grs - 0015216123

### Applications: Benefits & Features

- Corrosion Protection:** Optional, All Stainless Steel components for demanding applications such as outdoor, wash-down, food processing, or other corrosive environments.
- Targeted Applications:** Conveyor / skate wheels for straight or curved gravity flow conveyor applications, extendable and flexible conveyors, wheel rail and flow rails. Low profile allows wheel to function as a bearing when coupled with PVC rollers providing a low cost, lightweight and effective option. Used primarily in Packaging, Shipping, Warehousing, Assembly and Cargo/Ground Support Equipment. Also performs well in refrigerator/freezer applications.
- Performance:** FRANTZ conveyor wheels undergo rigorous testing to assure years of satisfactory use and are engineered to meet or exceed CEMA standard of one million revolutions. The FRANTZ Sterling® Steel Ball Division manufactures balls for the auto and defense industries under a Quality Management System registered to IATF 16949:2016.

...Roll Easy with FRANTZ®

FRANTZ

Customer Service, Product Samples and Quotations: 815.625.7063

FRANTZ Manufacturing Company P.O. Box 497, Sterling IL 61081-0497 [www.frantz-mfg.com](http://www.frantz-mfg.com)