





2910

Unground / Commercial Bearing

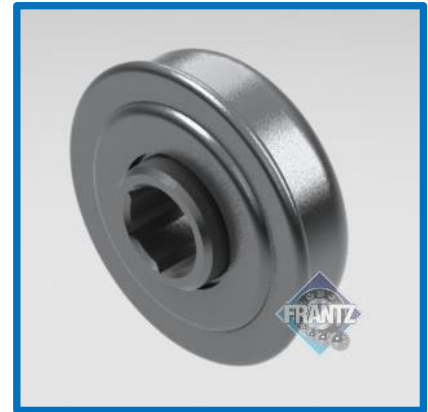

Specifications

- Bearing Type:** Flanged Unground Non-Precision
- Load Capacity:** 145 lbs.
- Mounting Type:** Press Fit
- Tube Size/Gauge:** 1-5/8" x 18g *
- Max OD of Body:** 1.530"
- Bore Size & Type:** 7/16" – Hex
- Extension:** 0.218"
- Lubrication:** Oil or Grease
- Option:** All Stainless Steel Version
- Temperature Range:** Oil, -10 to 220 F°
Grease, -20 to 220 F° **
- Protection:** Front – Polymer Seal
Rear – Polymer Seal
- Regreasable:** No

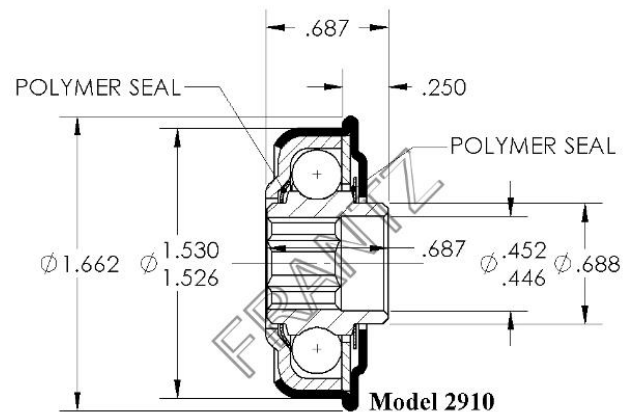

Part Number for Ordering:

Oil - 2910226023
Grs - 2910226123

* Also press fit into 1-11/16" x 14g and heavy press fit into 1-5/8" x 17g tubes.

** Consult with FRANTZ Customer Service for high temp application recommendations.

Applications: Benefits & Features

Non-Precision Bearing: FRANTZ Unground / Commercial bearings offer the least rolling resistance, lower energy consumption and overall a greener option. Engineered to accommodate more axle deflection due to heavy loads or shock, especially when used in longer rollers (as compared to Precision or Semi-Precision bearings), often making commercial bearings the product of choice in many conveyor designs.

Targeted Applications: Gravity or powered conveyor applications at low to medium speeds used primarily in packaging, palletizing, shipping/warehousing, cargo dollies and assembly.

Ball Quality: FRANTZ also manufactures the balls used in the 2910 under strict IATF 16949:2016 quality standards designed for supporting the requirements of the auto industry, thus providing another level of quality over competitive models.

Long Life: FRANTZ Unground / Commercial bearings are engineered and tested to exceed the CEMA standard or one million revolutions.

...Roll Easy with FRANTZ®

FRANTZ

Customer Service, Product Samples and Quotations: 815.625.7063

FRANTZ Manufacturing Company P.O. Box 497, Sterling IL 61081-0497 www.frantz-mfg.com