




31SS

Conveyor / Skate Wheel



Specifications

Wheel Type:	Stainless Steel, Non-Precision
Load Capacity:	100 lbs.
Body Diameter:	1-15/16"
Bore Size & Type:	1/4" – Round; Length 13/16"
Lubrication:	Oil or Grease
Ball Complement:	(7) - 1/4" Diameter
Material:	304 Stainless Steel Shell, Washer, & Raceways & 303 Stainless Steel Inner Race & 440C Stainless Steel Balls
Temperature Range:	Oil, -10 to 400 F° Grease, -40 to 120 F°**
Protection:	Labyrinth Shield, Front & Rear
Regreasable:	No – Maintenance Free
Other:	No lube & extreme cold oil available; contact Customer Service

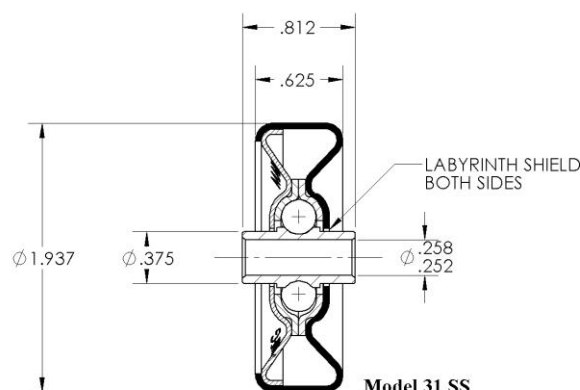

Model 31 SS

Part Number for Ordering:

Oil - 0031217023
Grs - 0031217123

** If grease is required with application temperatures above 120 F° please consult with FRANTZ customer service to discuss application and options.

Applications: Benefits & Features

Stainless Steel Wheel: Stainless Steel Wheel offers excellent strength, corrosion resistance and allows intermittent washdown. Stainless steel makes this ideal for areas where aesthetics or corrosion is a concern.

Targeted Applications: Conveyor / skate wheels for straight or curved gravity flow conveyor applications, extendable conveyors, flow rails, lift gates. Used primarily in Shipping, Warehousing and Assembly.

Performance: FRANTZ conveyor wheels undergo rigorous testing to assure years of satisfactory use. The FRANTZ Sterling® Steel Ball Division manufactures balls for the auto and defense industries under a Quality Management System registered to IATF 16949:2016.

FRANTZ

...Roll Easy with FRANTZ®

Customer Service, Product Samples and Quotations: 815.625.7063

FRANTZ Manufacturing Company P.O. Box 497, Sterling IL 61081-0497 www.frantz-mfg.com